

RoHS Compliant

Features:

- 1.4~16 circuits available;
- 2.Material:LCP UL94V-0 Black/Natural;
- 3.PIN Material:High conductivity copper alloy Tin-plated,SQ0.64;
- 4.Mates with H350012 housing;

Specification:

Current rating:14A at 16A.

Voltage rating:400V AC(RMS) or 400V DC Max.

Contact resistance:10mΩ Max.

Insulation resistance:100MΩ Min.

Withstanding voltage:1800VAC/minute.

Ambient temperature range: -40°C~105°C.

Dimensional information(mm)

Circuits	DIM A	DIM B
4	3.50	8.00
6	7.00	11.50
8	10.50	15.00
10	14.00	18.50
12	17.50	22.00
14	21.00	25.50
16	24.50	29.00

PART NO. INFORMATION

H350013-XX-X





SERIES NO:

PIN Q'PY:



04~16

A-BLACK (A KEY)

B-NATURE (B KEY)



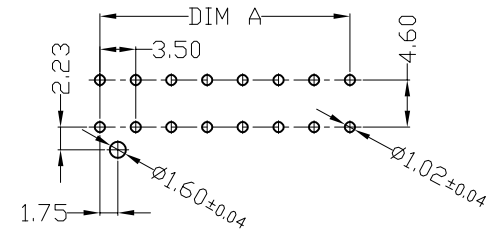

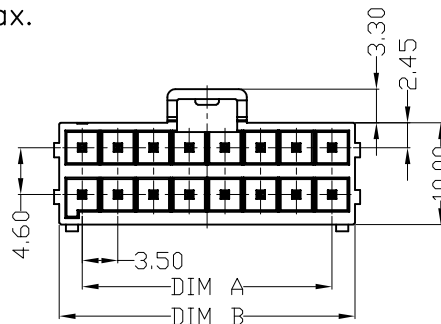
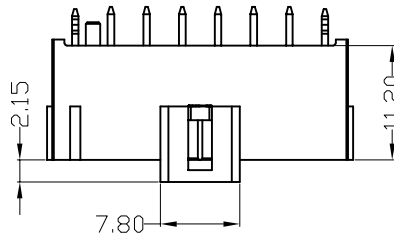


PCB Layout



B KEY

A KEY



Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.40	X'	± 3'
.XX	± 0.25	.X'	± 2'
.XXX	± 0.15	.XX'	± 1'

Website: www.bsc-elec.com

Email: bestcreate@bsc-elec.com

DESIGN:

I.L

CHECKED:

C.W

APPROVED:

C.W

DATE:

2018.3.5

DATE:

2018.3.5

DATE:

2018.3.5

TITLE:

3.5 mm Vertical Dual Row header

MATERIAL:

FINISH:

PART NO:

DWG NO:

H350013-XX-X

H350013-XX-X

SIZE: A4

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS

