


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

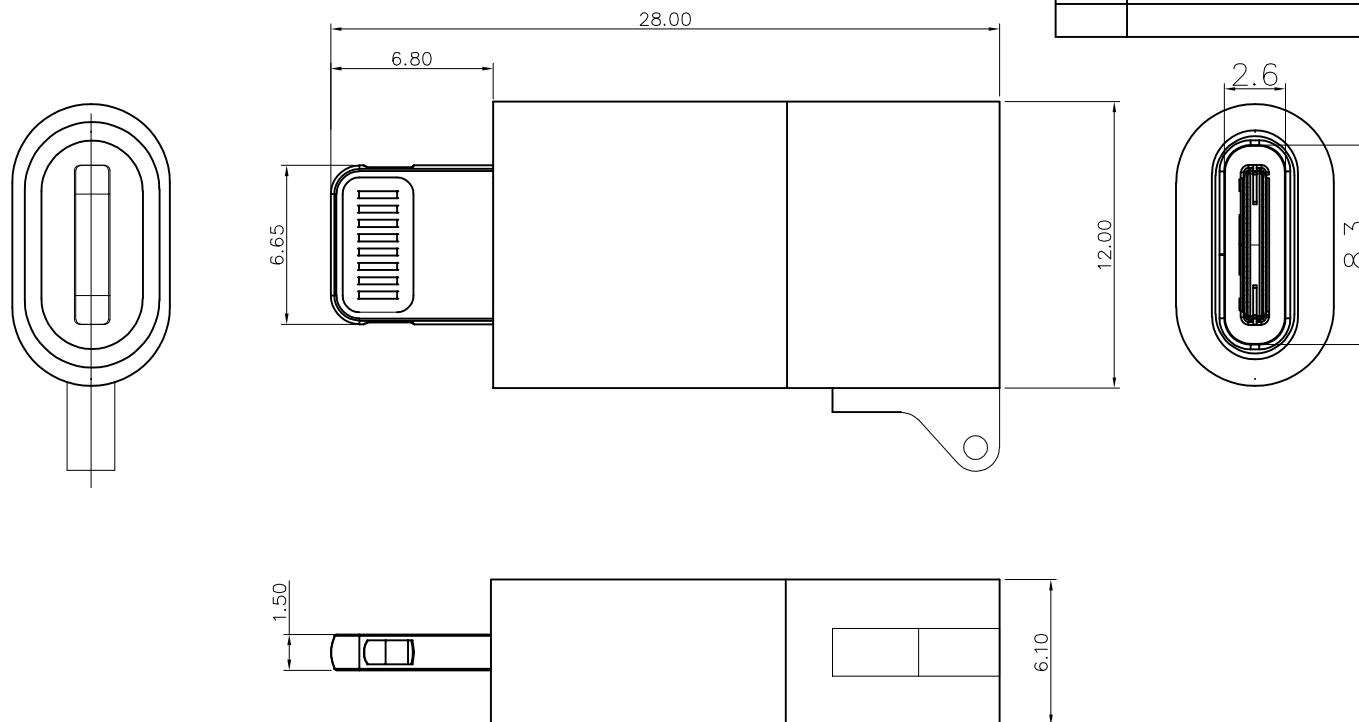

NOTE:

1. ELECTRICAL CHARACTERISTICS;
  - 2.1 CONTACT RESISTANCE: 80mΩ Max
  - 2.2 CONTACT CURRENT RATING: 1.5 A
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
  - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
  - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS:
  - 2.1 MATING FORCE: USB CF 5~20N & MICRO USB 35N Max.
  - 2.2 UNMATED FORCE: USB CF 8~20N & MICRO USB 10N Min.
3. PLATING
  - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING  
ALL OVER 50u"MIN NICKEL
  - 3.2 SHELL: 50u"MIN. NICEL ALL OVER

Color
White
Green
Black

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.'	±	5'
.X	±	0.30	.X'	±	2'
.XX	±	0.10	.XX'	±	1'

DESIGN:	DATE:
I.L	2017.3.1
CHECKED:	DATE:
C.W	2017.3.1
APPROVED:	DATE:
C.W	2017.3.1

TITLE:		
AP CM TO USB CF ADAPTER IC OTG		
MATERILA:	PART NO:	SIZE: A4
	ADAPCMCF-043	
FINSH:	DWG NO:	
	ADAPCMCF-043	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

Website: [www.bsc-elec.com](http://www.bsc-elec.com)  
Email: [bestcreate@bsc-elec.com](mailto:bestcreate@bsc-elec.com)