


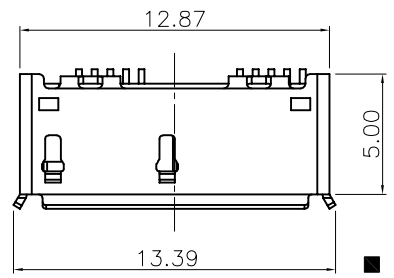
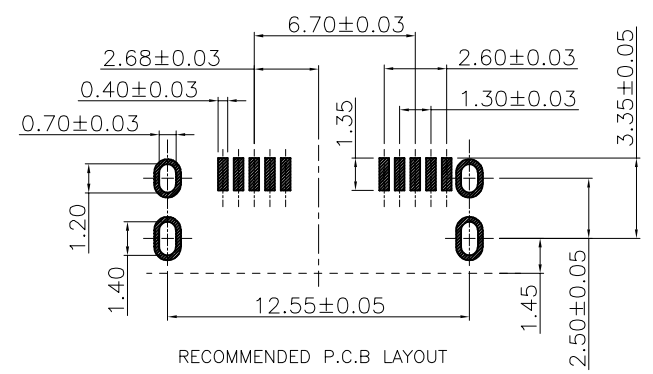
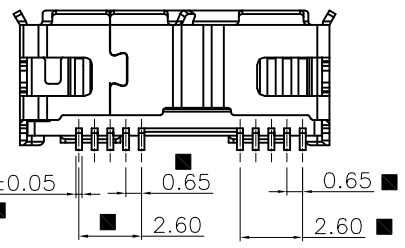


RoHS Compliant


REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

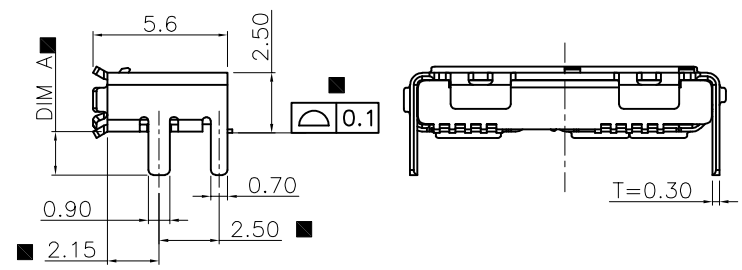

NOTE:
 1.MATERIAL:
 INSULATOR:THERMOPLASTICG.F.U.L94V-0,BLACK
 CONTACTS:COPPER ALLOY
 SHELL:METAL
 2.FINISH:
 SHELL:100μ" MIN.TIN PLATE OVER 50μ"NICHEL
 CONTACTS:1~30μ"MIN.GOLD ON MATING AREA,
 100μ"MIN.TIN ON THE TAILS.
 3.ELECTRICAL CHARACTERISTICS;
 3.1 CONTACTRESISTANCE:30mΩ MAX
 3.2 CONTACT CURRENT RATING:1.5A MAX
 3.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
 3.4 INSULATION RESISTANCE 100 MΩ MIN
 3.5 OPERATING TEMPERDURE:-20°C ~ 60°C
 4.MECHANICAL CHARACTERISTICS:
 4.1 MATING FORCE:3.5kgf MAX
 4.2 UNMATING FORCE:1.0kgf MIN
 4.3 DURABILITY:10,000 CYCLES
 5.QC DIMENSION CHECK
 ■ CRITICAL ☒ MAJOR □ MINOR

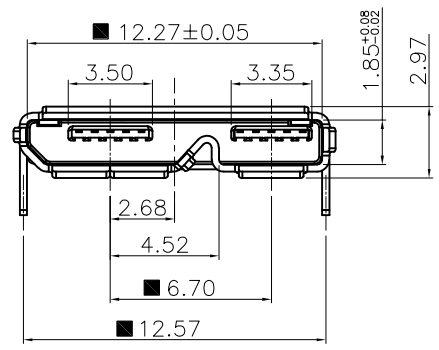

PART NO. INFORMATION

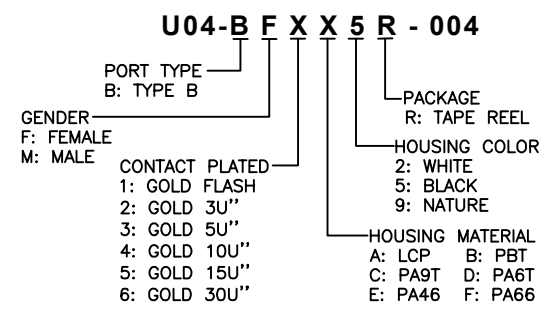

3	SHELL	1	SUS304	SEE NOTE
2	TERMINAL	10	C2680-H	SEE NOTE
1	Molding-ASSY	1	LCP	UL94V-0; COLOR:BLACK
NO.	TITLE	Q'TY	MATERIAL	REMARK

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.50	X'	± 3'
.X	± 0.25	.X'	± 2'
.XX	± 0.15	.XX'	± 1'
Website:www.bsc-elec.com			
Email:bestcreate@bsc-elec.com			

DESIGN:	I.L	DATE:	2017.3.1
CHECKED:	C.W	DATE:	2017.3.1
APPROVED:	C.W	DATE:	2017.3.1

TITLE: MICRO USB 3.0母头四脚插板		
MATERILA:	PART NO: U04-BFXX5R-004	SIZE: A4
FINSH:	DWG NO: U04-BFXX5R-004	

REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS
--------	----------	------------	-----------------