

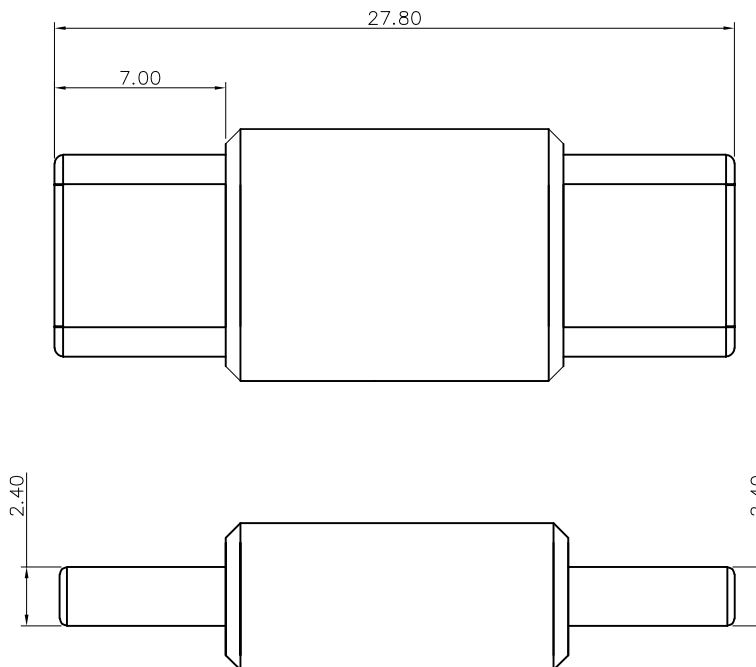


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

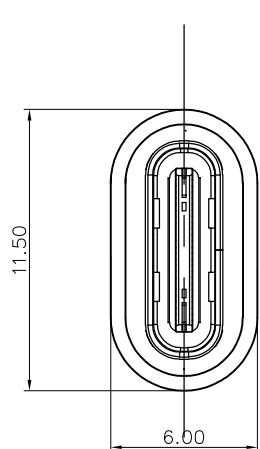

NOTE:

1. ELECTRICAL CHARACTERISTICS;
  - 2.1 CONTACT RESISTANCE: 80mΩ Max
  - 2.2 CONTACT CURRENT RATING: 1.5 A
  - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: 100 V R.M.S.
  - 2.4 INSULATION RESISTANCE 100 MEGOHMS Min
  - 2.5 OPERATING TEMPERATURE: -25° C ~ 75° C
2. MECHANICAL CHARACTERISTICS:
  - 2.1 MATING FORCE: USB CM 5~20N & MICRO USB 35N Max.
  - 2.2 UNMATED FORCE: USB CM 8~20N & MICRO USB 10N Min.
3. PLATING
  - 3.1 TERMINAL CONTACT: (SEE TAB) GOLD PLATING  
ALL OVER 50u"MIN NICKEL
  - 3.2 SHELL: 50u"MIN. NICEL ALL OVER

3	TYPE CM		TYPE C M NI	1PCS
2	TYPE CF		TYPE C F NI	0.005KG
1	PCBA		TYPE CM TO CF, NICKEL PLATED	1PCS
Item	Name	Part Number	Description	Q'TY

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 5'
.X	± 0.30	.X'	± 2'
.XX	± 0.10	.XX'	± 1'

Website: [www.bsc-elec.com](http://www.bsc-elec.com)  
Email: [bestcreate@bsc-elec.com](mailto:bestcreate@bsc-elec.com)

DESIGN:	DATE:
I.L	2017.3.1
CHECKED:	DATE:
C.W	2017.3.1
APPROVED:	DATE:
C.W	2017.3.1

TITLE:		
USB3.1 CM TO USB3.1 CM ADAPTER METAL CASE		
MATERILA:	PART NO:	SIZE:
	AD31CMCM-054	A4
FINSH:	DWG NO:	
	AD31CMCM-054	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
--------	---------	-----------	-----------------	--