


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN


NOTES:

- MATERIAL SPECIFICATION
  - INSULATION MATERIAL THERMOPLASTIC.
  - SHELL: C2680, T: 0.30mm  
PLATING: NICKEL
  - TERMINAL: COPPER ALLOY, T: 0.25mm  
PLATING: GOLD/TIN PLATED.
- ELECTRICAL CHARACTERISTIC:
  - INSULATION RESISTANCE: 1000MΩ MIN.
  - CONTACT RESISTANCE: 30mΩ MAX.
  - WITHSTANDING VOLTAGE: 500V AC.
- MECHANICAL CHARACTERISTICS:
  - INSERTION FORCE: 30N MAX (插拔测试前).
  - EXTRACTION FORCE: 12N MIN (插拔测试前).
  - INSERTION FORCE: 30N MAX (3500次插拔测试后).
  - EXTRACTION FORCE: 10N MIN (3500次插拔测试后).
- ENVIRONMENTAL:
 

OPERATING TEMPERATURE: -55° C ~ +85° C

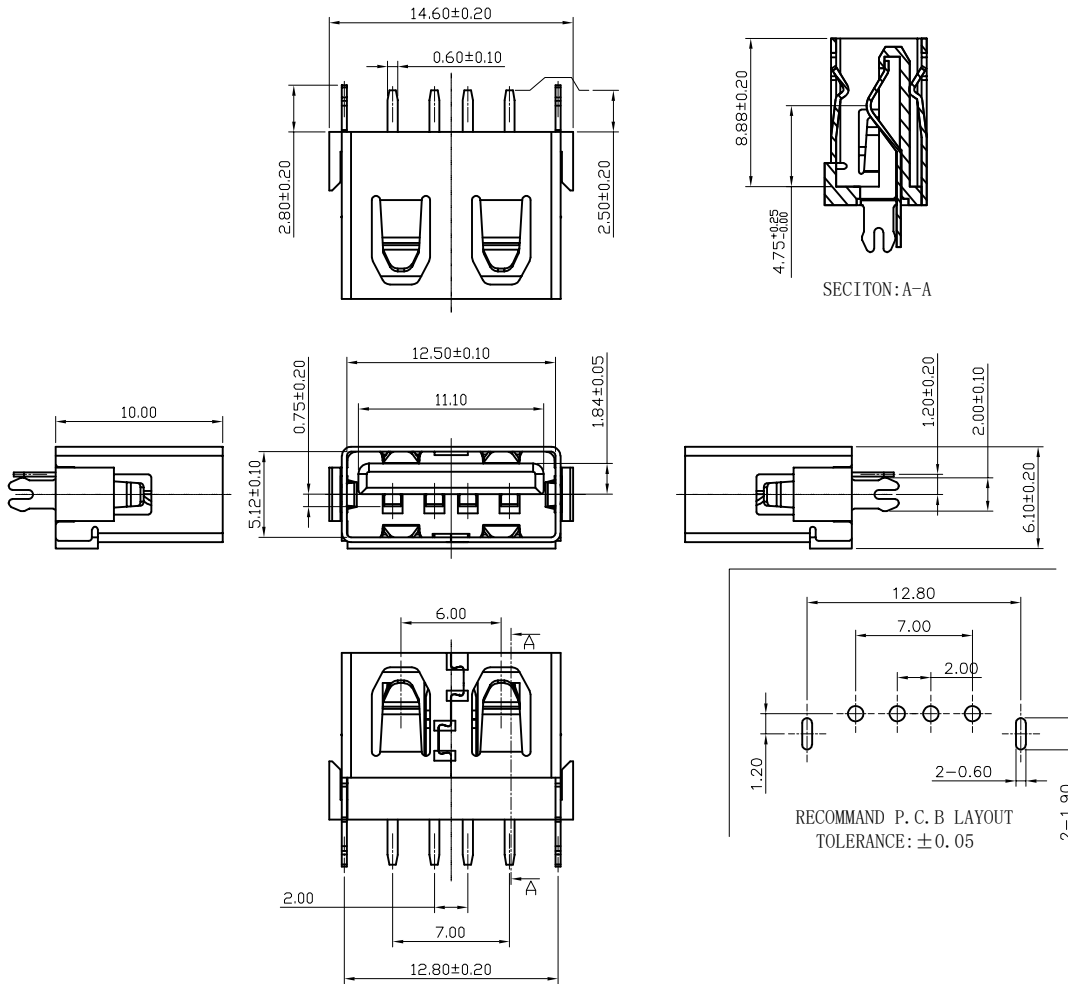

PART NO. INFORMATION

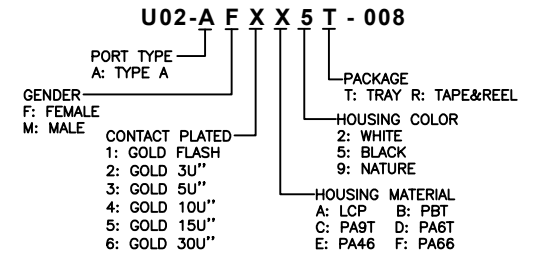

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:			
X.	± 0.50	X.*	± 3*
.X	± 0.30	.X*	± 2*
.XX	± 0.20	.XX*	± 1*

Website: www.bsc-elec.com  
Email: bestcreate@bsc-elec.com

DESIGN:	I. L	DATE:	2017. 3. 1
CHECKED:	C. W	DATE:	2017. 3. 1
APPROVED:	C. W	DATE:	2017. 3. 1

TITLE:			MID MOUNT USB 2.0 A/F SHORT BODY, L=10.0MM
MATERIAL:	PART NO:	U02-AFXX5T-008	
FINISH:	DWG NO:	U02-AFXX5T-008	
SIZE:		A4	

REV:	A	UNIT:	mm	SCALE:	1=1	QUALITY SYMBOLS:	
------	---	-------	----	--------	-----	------------------	--