
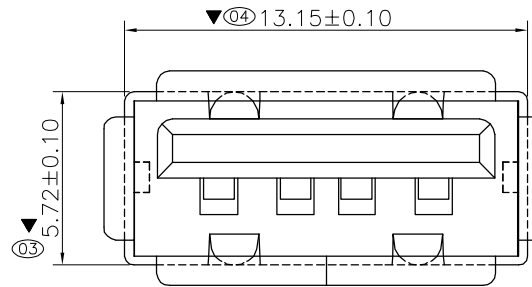


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

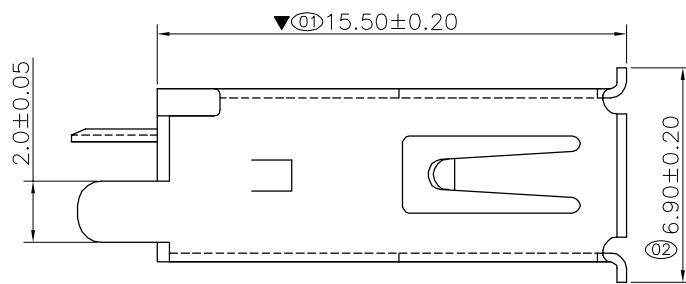

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流:Current Rating
1.5A/contact terminal
2. 额定电压:Voltage Rating
30V DC
3. 接触阻抗>Contact Resistance
30 milliohms Max
4. 耐电压:Dielectric Withstanding Voltage
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance
1000MEGA ohms MIN

原材料:Material:



1. 塑胶:Housing:
High Temperature Thermoplastics
PBT/LCP WHITE/BLACK
2. 端子>Contact:Copper Alloy C2680
3. 外壳:Shell:SPCC/C2680

电镀:Finish:

1. 端子>Contact:Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:SHELL:Nickel Plating

PART NO. INFORMATION

U02-A F X X 5 T - 019

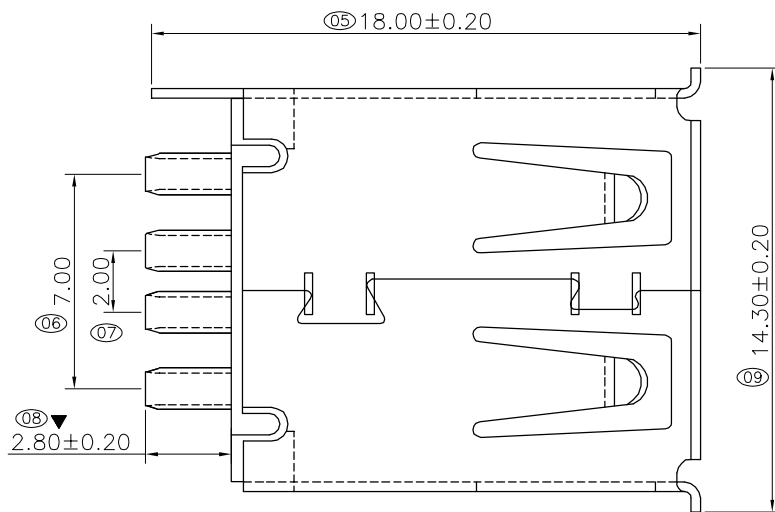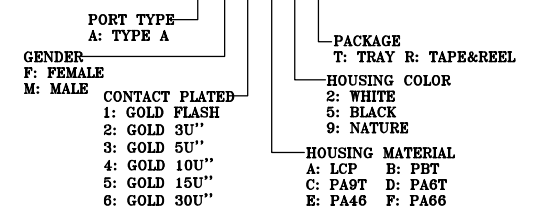

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	±	0.50	X.*	±	3'
.X	±	0.30	.X*	±	2'
.XX	±	0.20	.XX*	±	1'

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017. 3. 1

CHECKED: C. W DATE: 2017. 3. 1

APPROVED: C. W DATE: 2017. 3. 1

TITLE: USB 2.0 A/F 180° WIRE SOLDERING

MATERILA:	PART NO: U02-AFXX5T-019	SIZE: A4
FINSH:	DWG NO: U02-AFXX5T-019	

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------