


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

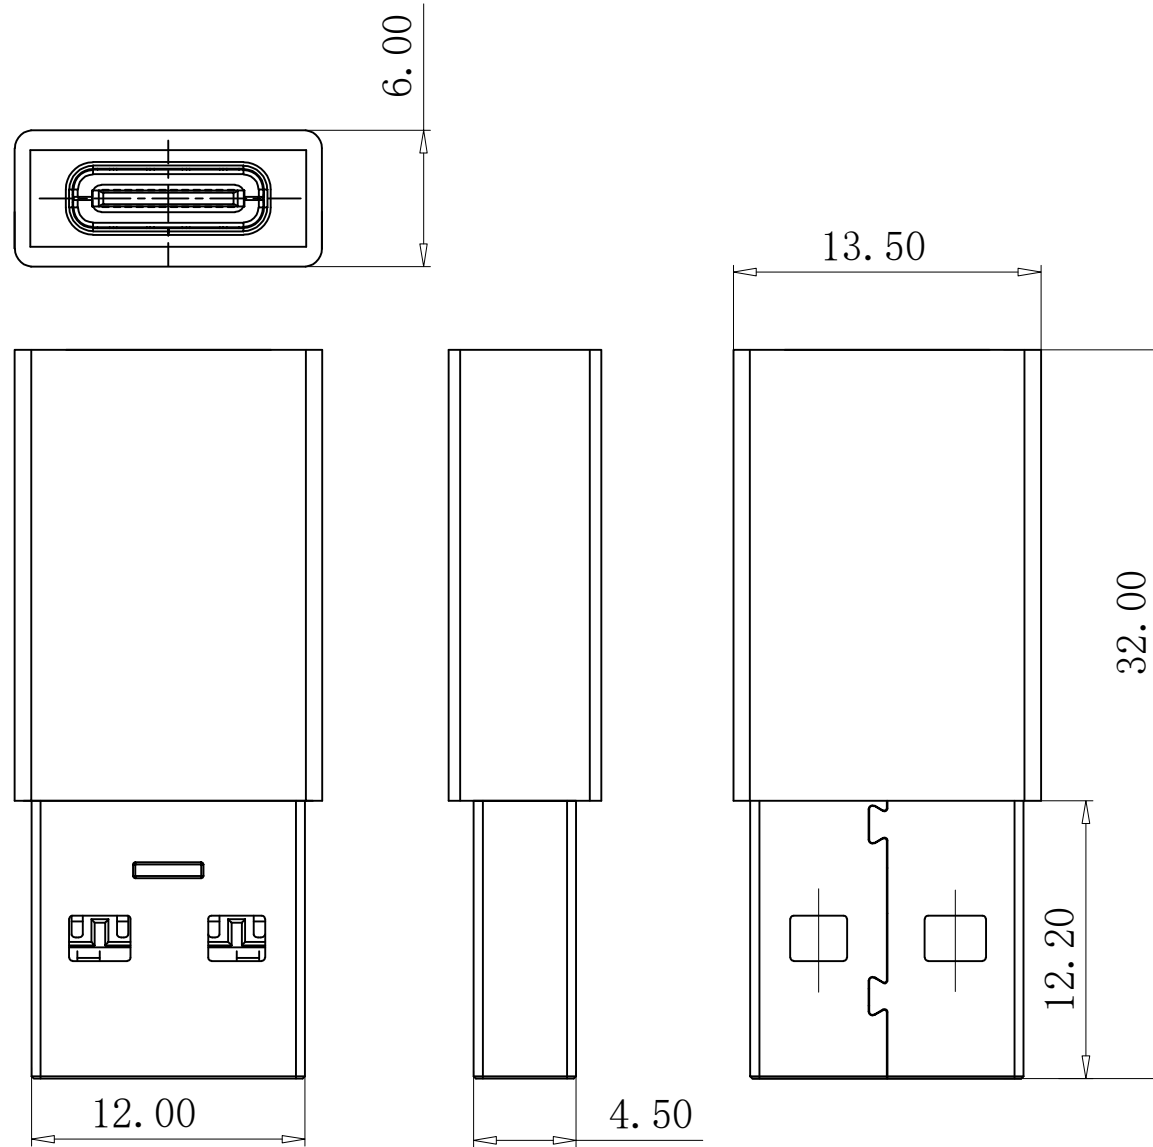

- NOTE:
- ELECTRICAL CHARACTERISTICS;
 - CONTACT RESISTANCE: 80mΩ Max
 - CONTACT CURRENT RATING: 1.5 A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE: -25° C ~ 75° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: USB CM 5~20N & USB3.0 AF 35N Max.
 - UNMATED FORCE: USB CM 8~20N & USB3.0 AF 10N Min.
 - PLATING
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL
 - SHELL: 50u"MIN. NICKEL ALL OVER

3	Shell	USB3.0 AM Plastic cover 28*16.24*8.52mm, white&Black	1PCS	
2	PVC	PVC 45P, COLOR: WHITE&Black	0.005KG	
1	PCBA	USB3.0 AM TO TYPE CF R: 5.1k C: 10nF, nickel plated	1PCS	
Item	Name	Part Number	Description	QTY

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X'	± 5'
.X	± 0.30	.X'	± 2'
.XX	± 0.10	.XX'	± 1'

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:	DATE:	2017.3.1
I.L	CHECKED:	DATE:
C.W	DATE:	2017.3.1
APPROVED:	DATE:	2017.3.1
C.W	DATE:	2017.3.1

TITLE: USB3.1 CF TO USB3.0 AM ADAPTER		
MATERILA:	PART NO:	SIZE: A4
FINSH:	DWG NO:	AD31CFAM-056

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------