




RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN



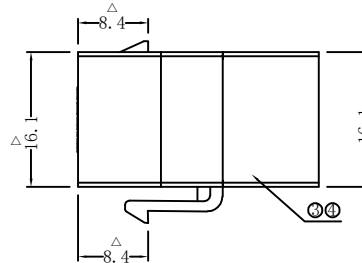


包装



CN1

CN2

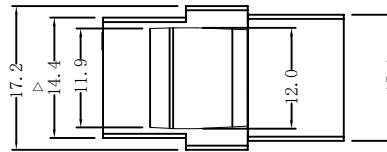

接点表

CN1		CN2	
A1	A12	B1	B12
A4	A9	B4	B9
A5	A5	B5	B5
B5	B5	A6	B6
A6	B6	A6	B6
A7	B7	A7	B7
A2	B11	A2	B11
A3	B10	A3	B10
B11	A2	B11	A2
B10	A3	B10	A3
B2	A11	B2	A11
B3	A10	B3	A10
A8	B8	A8	B8
B8	A8	B8	A8
SHELL	SHELL	SHELL	SHELL

注:

- 100%短/断路&错线测试条件。
- 导通阻抗 $\leq 5\Omega$ ，绝缘阻抗 $\geq 10M\Omega$ 。高压测试,DC 300V/10mS。
- 支持双面电源100W、电流5A、数据10Gbps传输功能。
- 标有“△”为重要量测尺寸。
- 产品采用PCB板连接。
- TYPE C母口有方向区分，插拔次数5000次
- 包装方式：夹链PE袋包装，1PE袋装1PCS。
- 所用材质须符合ROHS要求。

序号	名称	材料	物料编号	用量
5	包装	PE袋 L:70MM W:50MM 透明	5.25.02	1PCS
4	外型	ABS胶壳(前后壳内扣式)	5.11.033-034	2PCS
3	内连接	PCB板 T=1.0MM	5.12.274	1PCS
2	连接器	USB TYPE C/F 壳体镀镍 PIN针镀金G/F	5.03.58	1PCS
1	连接器	USB TYPE C/F 壳体镀镍 PIN针镀金G/F	5.03.58	1PCS

**Bestcreate Technology Limited**

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.'	± 5'
.X	± 0.30	.X'	± 2'
.XX	± 0.10	.XX'	± 1'

DESIGN:

DATE:

I. L 2017. 3. 1

CHECKED:

DATE:

C. W 2017. 3. 1

APPROVED:

DATE:

C. W 2017. 3. 1

TITLE:

USB3.1 CF TO USB 3.1 CF ADAPTER 180°

MATERILA:

PART NO:

SIZE:

AD31CF31CF-001

A4

FINSH:

DWG NO:

AD31CF31CF-001

REV:

A

UNIT

mm

SCALE

1=1

QUALITY

SYMBOLS



Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

1

2

3

4

5

6

7

8