

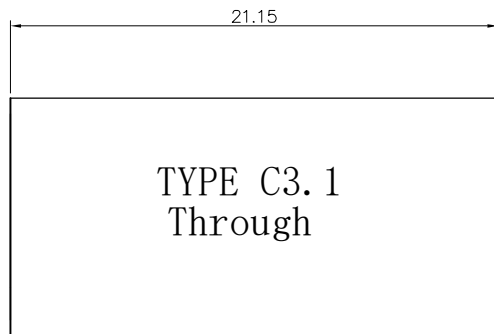


RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

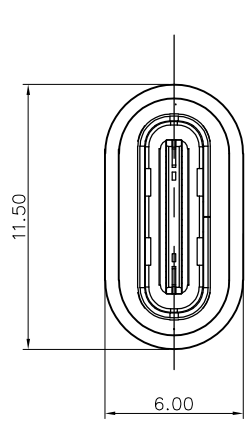

- NOTE:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 80mΩ Max
 - CONTACT CURRENT RATING: 1.5 A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V R. M. S.
 - INSULATION RESISTANCE 100 MEGOHMS Min
 - OPERATING TEMPERATURE: -25° C ~ 75° C
 - MECHANICAL CHARACTERISTICS:
 - MATING FORCE: USB CM 5~20N & MICRO USB 35N Max.
 - UNMATED FORCE: USB CM 8~20N & MICRO USB 10N Min.
 - PLATING
 - TERMINAL CONTACT: (SEE TAB) GOLD PLATING ALL OVER 50u"MIN NICKEL
 - SHELL: 50u"MIN. NICEL ALL OVER

3	TYPE CM		TYPE C M NI	1PCS
2	TYPE CF		TYPE C F NI	0.005KG
1	PCBA		TYPE CM TO CF, NICKEL PLATED	1PCS
Item	Name	Part Number	Description	Q'TY

Bestcreate Technology Limited			TOLERANCES UNLESS OTHERWISE SPECIFIED:		DESIGN: I.L	DATE: 2017.3.1	TITLE: USB3.1 CF TO USB3.1 CF ADAPTER	
			X. ± 0.50	X.' ± 5'	CHECKED: C.W	DATE: 2017.3.1	MATERIAL: AD31CFAM-057	PART NO: AD31CFAM-057
REV: A	UNIT: mm	SCALE: 1=1	QUALITY SYMBOLS	Website: www.bsc-elec.com	APPROVED: C.W	DATE: 2017.3.1	FINSH: AD31CFAM-057	DWG NO: AD31CFAM-057
				Email: bestcreate@bsc-elec.com				