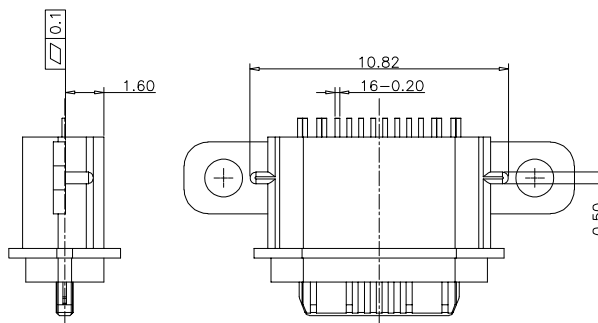
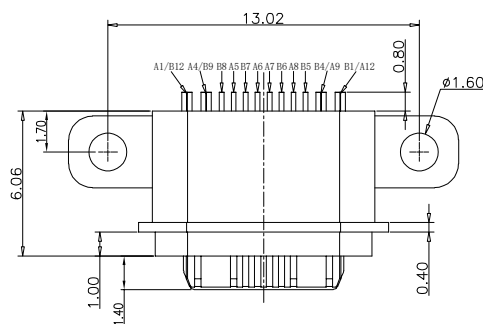
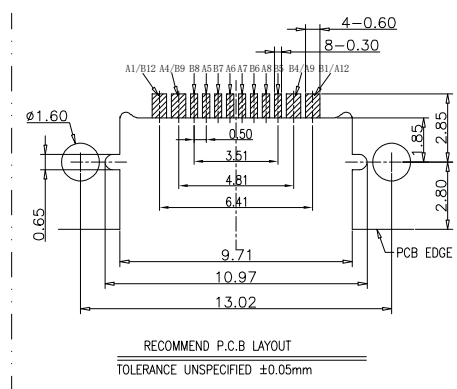
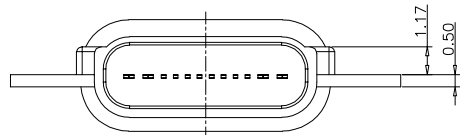


PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

11.WATERPROOF:IP-X7.

U06-C F X X 5 R - W022

PORT TYPE —
C: TYPE C

GENDER
F: FEMALE
M: MALE

PACKAGE
R: TAPE REEL

HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE

CONTACT PLATED —
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL,NI PLATED
2	CONTACT	16	COPPER ALLOY,TIN/Au/NI PLATED
3	MID PLATE	1	STAINLESS STEEL,NO PLATING
4	HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

Bestcreate Technology Limited

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS	
-----------	------------	--------------	--------------------	---

.X	±	0.20	X*	±	5°
.XX	±	0.15	.X*	±	2°
.XXX	±	0.10	.XX*	±	1°

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN:	DATE:
I.L	

CHECKED: C.W. DATE:

APPROVED: C. W. DATE:

TITLE: **Waterproof USB 3.1 type C 16P Female Connector with screw
Mid-Mount 1.6mm, L=6.5mm**


MATERILA:	PART NO: U06-CFXX5R-W022	SIZE: A4
FINSH:	DWG NO: U06-CFXX5R-W022	1 OF 3

RoHS Compliant





REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

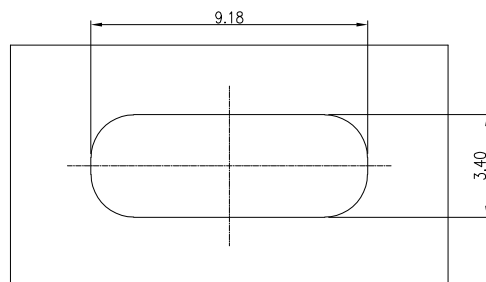

密封开孔参考尺寸(只供参考)
组装外壳时需要打环保润滑油

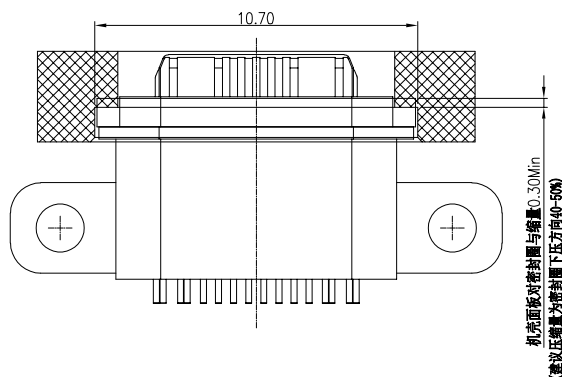

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.20	X.*	±	5°
.XX	±	0.15	.X°	±	2°
.XXX	±	0.10	.XX°	±	1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I. L
DATE:

CHECKED: C. W
DATE:

APPROVED: C. W
DATE:





TITLE:
Waterproof USB 3.1 type C 16P Female Connector with screw
Mid-Mount 1.6mm, L=6.5mm

MATERILA:	PART NO: U06-CFXX5R-W022	SIZE: A4
FINSH:	DWG NO: U06-CFXX5R-W022	2 OF 3

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------

RoHS Compliant

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

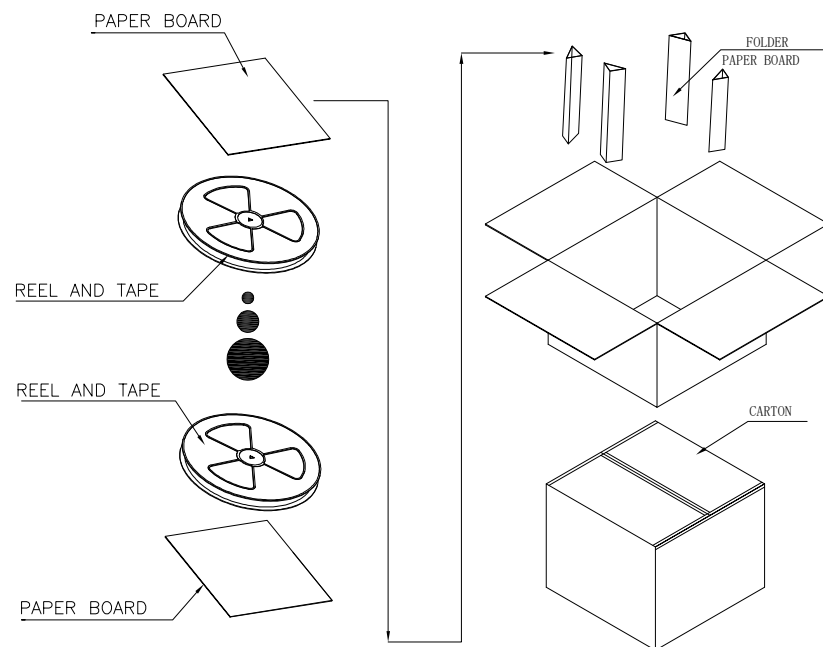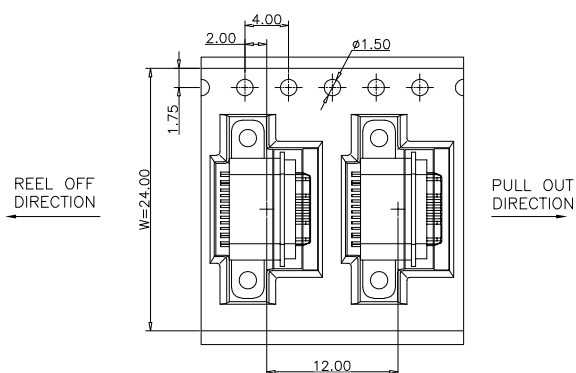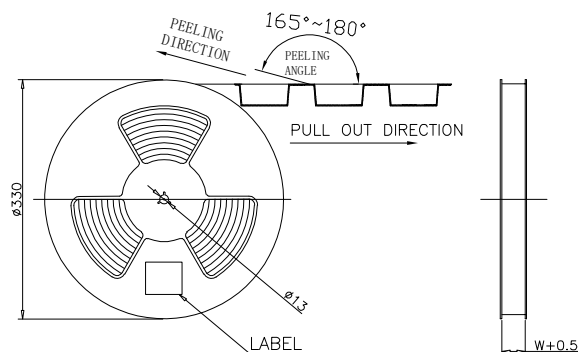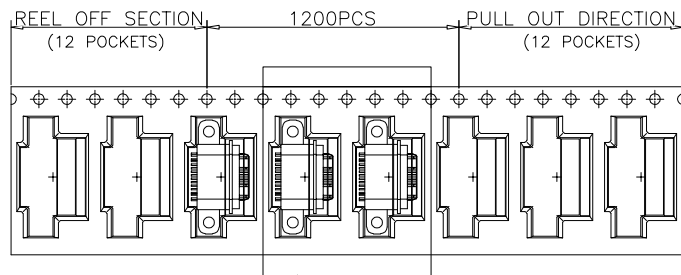

CONNECTOR (PCS)	REEL	CARTON
	1200	700

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	± 0.20	X.*	± 5°
.XX	± 0.15	.X*	± 2°
.XXX	± 0.10	.XX*	± 1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN: I.L
DATE:

CHECKED: C.W
DATE:

APPROVED: C.W
DATE:

TITLE:
Waterproof USB 3.1 type C 16P Female Connector with screw
Mid-Mount 1.6mm, L=6.5mm

MATERILA:	PART NO: U06-CFXX5R-W022	SIZE: A4
FINSH:	DWG NO: U06-CFXX5R-W022	3 OF 3

REV: A
UNIT mm
SCALE 1=1
QUALITY SYMBOLS