
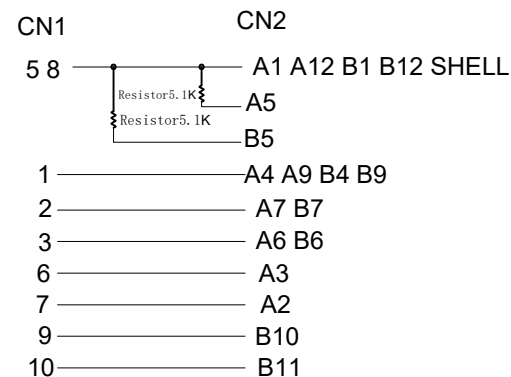








RoHS Compliant

COLOR	PLATING
BLACK	NICKEL
GRAY	NICKEL

REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

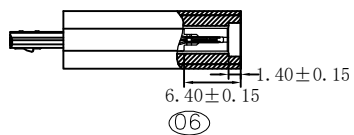

6	RESISTOR	2*Resistor5.1K 0402	5.15.01	2PCS
5	SHELL	Aluminium Alloy SHELL BLACK	5.10.02-1	2.3G
4	Outer Mold	PVC 45P BLACK	5.09.02-1	1.7G
3	In-Connection	PCB T=0.80MM		1PCS
2	Connector	USB TYPE CF SHELL NICKEL PLATED PIN G/F	18.02.26.004	1PCS
1	Connector	USB 3.0 MICRO BM SHELL NICKEL PLATED PIN G/F		1PCS
NO	NAME	MATERIAL	NO	QTY

NOTES:

- 1.100% open short test condition;
2. Conductor Resistance $\leq 5 \Omega$, insulation resistance $\geq 10M \Omega$.
High voltage test, DC 300V/10mS.
3. Support Power Charging、Data Transfer.
4. PCB Board Connection.

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.50	X.*	± 5°
.X	± 0.30	.X*	± 2°
.XX	± 0.10	.XX*	± 1°

Website: www.bsc-elec.com
Email: bestcreate@bsc-elec.com

DESIGN: I. L DATE: 2017.3.1

CHECKED: C. W DATE: 2017.3.1

APPROVED: C. W DATE: 2017.3.1

TITLE: USB3.0 MICRO BM TO TYPE CF 180°

MATERILA: PART NO: AD30MBCF-015 SIZE: A4

FINSH: DWG NO: AD30MBCF-015

REV: A	UNIT mm	SCALE 1=1	QUALITY SYMBOLS
--------	---------	-----------	-----------------