




RoHS Compliant



REVISIONS			
REV.	DESCRIPTION	DATE	DESIGN

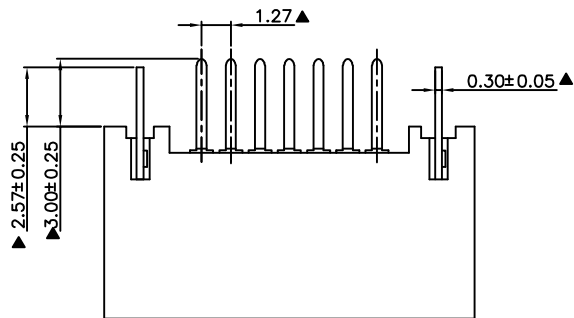

SECTION A-A

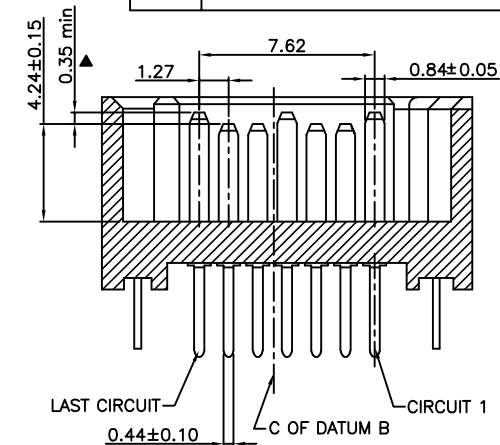

SECTION B-B

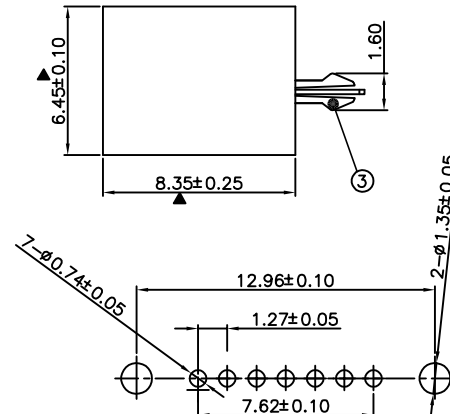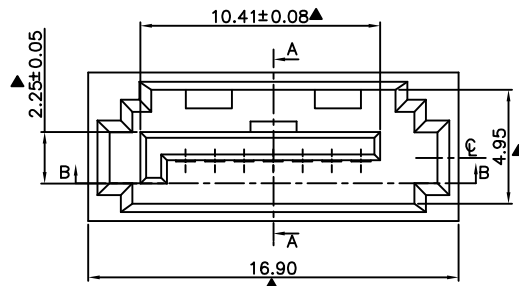

PCB LAYOUT

SPECIFICATION:

1.MATERIAL:

HOUSING: LCP LG431-9731L 30% G/F UL 94V-0
COLOR:BLACK
CONTACT:BRASS C2680R-H,T=0.25mm
PEG: BRASS C2680R-H,T=0.30mm

2.FINISH:

CONTACT: 1u" GOLD/TIN PLATING ON CONTACT AREA
100u" MIN. TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
PEG: 100u" MIN. TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL

PART NO. INFORMATION

S700 - M X A 5 T -001 -V3

GENDER
F: FEMALE
M: MALE

CONTACT PLATED
1: GOLD FLASH/TIN
2: 15U" GOLD/TIN
3: 30U" GOLD/TIN

PACKAGE
T: TRAY
R:TAPE REEL

HOUSING COLOR
5: BLACK

HOUSING MATERIAL
A: LCP

3	Board lock	Brass C2680		Gold/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

X.	± 0.30	X.*	± 3*
.X	± 0.20	.X*	± 2*
.XX	± 0.15	.XX*	± 1*

Website: www.bsc-elec.com

E-mail: bestcreate@bsc-elec.com

DESIGN:

I. L

DATE:

2017. 3. 1

CHECKED:

C. W

DATE:

2017. 3. 1

APPROVED:

C. W

DATE:

2017. 3. 1

TITLE:

SATA 7P 单排脚A型全包 DIP:3.00鱼叉式

MATERILA:

FINSH:

PART NO:

S700-MXA5T-001-V3

SIZE:

A4

DWG NO:

S700-MXA5T-001-V3

SHEET:

1 OF 1

REV:

A

UNIT

mm

SCALE

1=1

QUALITY

SYMBOLS

