
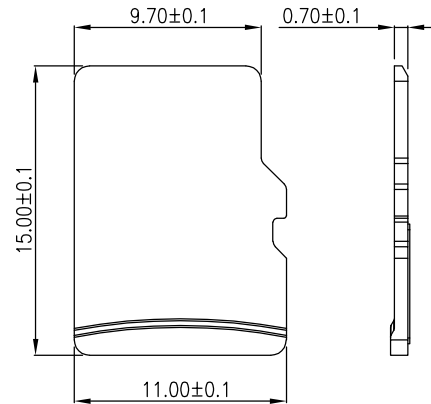
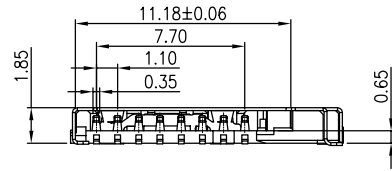
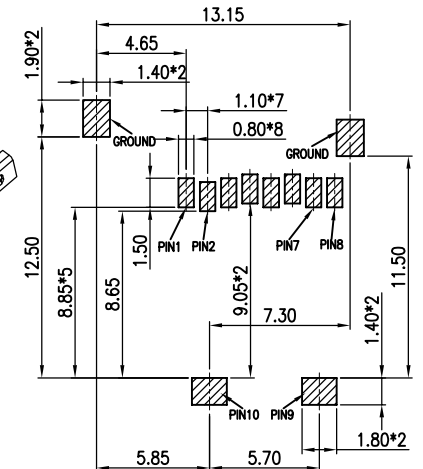
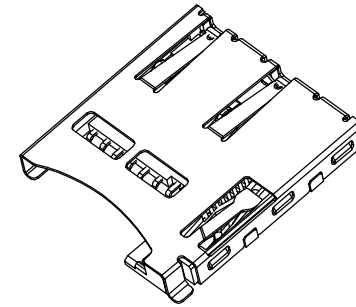
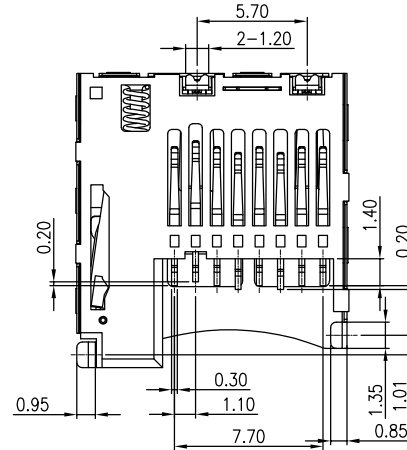

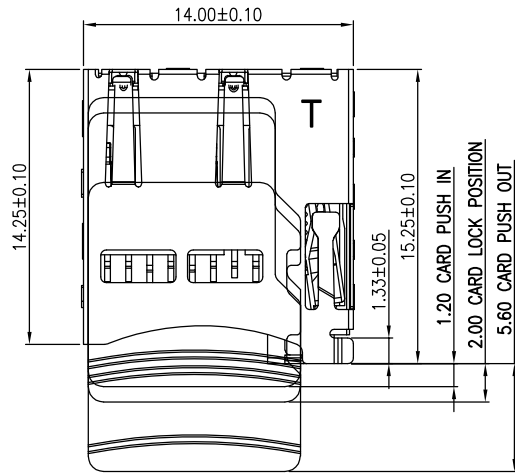


RoHS Compliant



MICRO-SD CARD

Pin No.	MICRO	SD
PIN1	DAT2	1P
PIN2	CD/DAT3	2P
PIN3	CMD	3P
PIN4	VDD	4P
PIN5	CLK	5P
PIN6	VSS	6P
PIN7	DAT0	7P
PIN8	DAT1	8P
PIN9	CARD DETECT	
PIN10		

规格说明:

1.尺寸测量:

1-1 "▲"为重点检验尺寸;

2.电气特性 Electrical Performance

2-1 额定电压: 20V DV

额定电流: 0.5A Max;

2-2 接触电阻: 100 mΩ Max;

2-3 绝缘电阻: 1000MΩ MIN. 500V DC 测试时长1分钟.

3.机械特性 Mechanical Performance

3-1 锁退卡耐久: 5000 Cycles;

3-2 锁卡力: 40N Max;

3-3 退卡力: 1N Min;

3-4 端子正向力: 端子下压至离塑胶面0.10mm, 0.15-1.5N/PIN

4.环境特性 Environmental Performance

4-1 测试温度范围: -25 ℃ to +85 ℃;

4-2 盐雾测试: 5% 浓度盐水 盐雾24H.

PCB HOLES(PATTERN SIDE) t=1.60mm

NOTE:GENERAL TOLERANCE:±0.1mm

PART NO. INFORMATION

TFWF - 08 X X 5 R - 010

08:8P

CONTACT PLATED
1: GOLD FLASH
2: GOLD 3U"
3: GOLD 5U"
4: GOLD 10U"
5: GOLD 15U"
6: GOLD 30U"

PACKAGE
R: TAPE REEL
HOUSING COLOR
2: WHITE
5: BLACK
9: NATURE

HOUSING MATERIAL
A: LCP B: PBT
C: PA9T D: PA6T
E: PA46 F: PA66

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.35	X.*	±	5"
.XX	±	0.25	.X.*	±	2"
.XXX	±	0.15	.XX.*	±	1"

Website:www.bsc-elec.com

Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

TF 卡座 内焊 1.85H 8P PUSH-PUSH

外壳带" T " 黑载带自粘【推卡极限1.20mm】

MATERILA:

PART NO:

SIZE:

FINSH:

DWG NO:

TFWF-08XX5R-010

SHEET:


1 OF 2

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS




RoHS Compliant

REVISIONS

REV.	DESCRIPTION	DATE	DESIGN

NOTES

1. 每卷包装数量:1000PCS/每卷
2. 卷带包装方式:




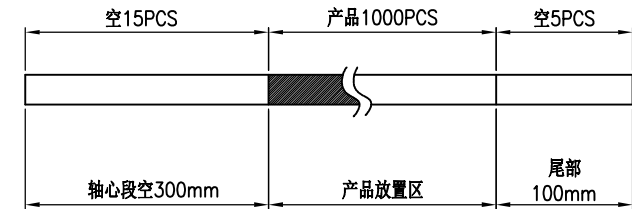


3. 每箱包装数量:10000PCS/箱

4. 重量 :

4.1 净重 : Kg

4.2 毛重 : Kg

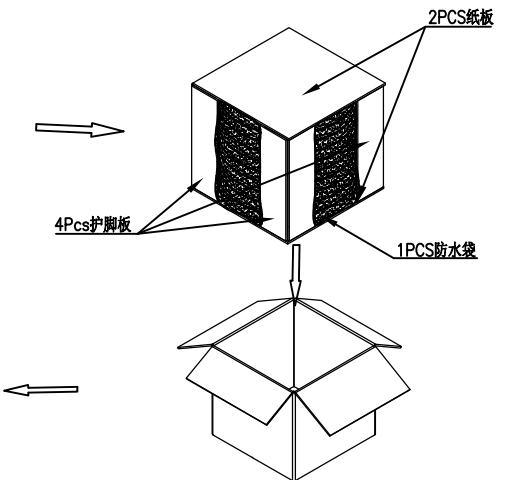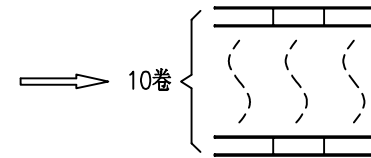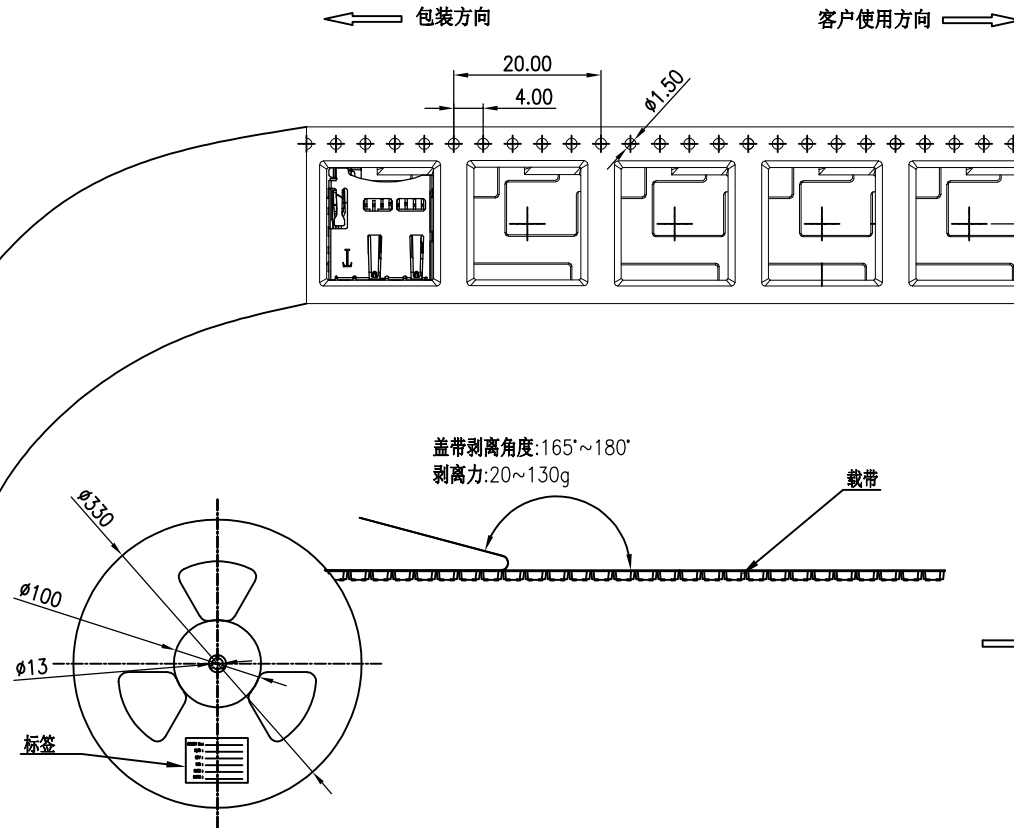

Bestcreate Technology Limited

TOLERANCES UNLESS OTHERWISE SPECIFIED:

.X	±	0.35	X.*	±	5°
.XX	±	0.25	.X*	±	2°
.XXX	±	0.15	.XX*	±	1°

Website:www.bsc-elec.com
Email:bestcreate@bsc-elec.com

DESIGN:

DATE:

I. L

2017. 3. 1

CHECKED:

DATE:

C. W

2017. 3. 1

APPROVED:

DATE:

C. W

2017. 3. 1

TITLE:

TF 卡座 内焊 1.85H 8P PUSH-PUSH
外壳带“T” 黑载带自粘【推卡极限1.20mm】

MATERIAL:

PART NO:

SIZE:

FINISH:

DWG NO:

SHEET:

REV: A

UNIT mm

SCALE 1=1

QUALITY SYMBOLS



1

2

3

4

5

6

7

8